



Gallon Wall Mount

Model No: 1661

The Gallon Wall Mount is intended for use with a one gallon jug with dispensing pump. Securely mount unit to wall for stability, see instructions below. Follow the product manufacturer's instructions for product handling and use.

Items Needed (not included with unit)

- Philips Head Screwdriver
- Drill (use a bit smaller than the screw size to make pilot holes for the lag screws)
- (2) 1/4" x 3" Hex Head Lag Screws and Washers

Items Included

- Gallon Wall Mount Bracket (PN 116590)
- (1) 14" Stainless Lanyard (PN 114690)
- (1) 8-32 X 1/4" Screw (PN 74142)



Gallon jug with pump shown for reference only (not included with unit).

Mounting Instructions


1. Locate the center of a wall stud suitable for mounting the unit.

Tip: Measure desired height for consistency when mounting multiple units.

2. Hold unit in place (along wall stud center) and mark the holes needed for the lag screws—make sure unit sits level.

Note: Bracket has optional mounting holes on left and right of center for mounting flexibility.


3. Drill a pilot hole for each lag screw.

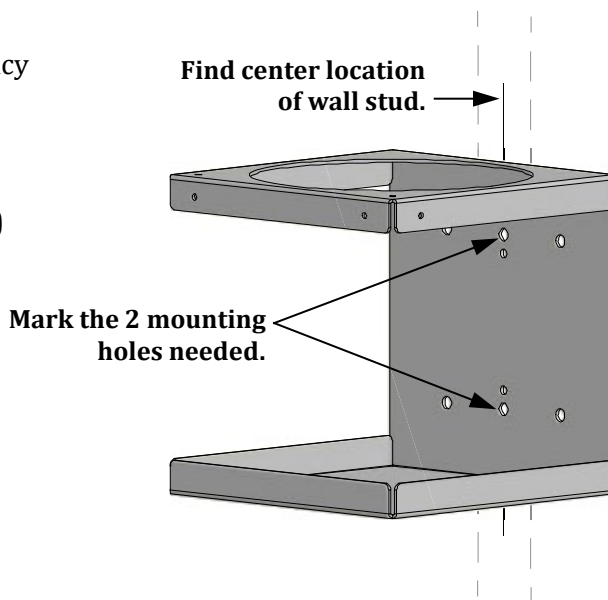



4. Mount unit to wall using the 2 lag screws and washers.

Align holes and fasten with
lag screws and washers.

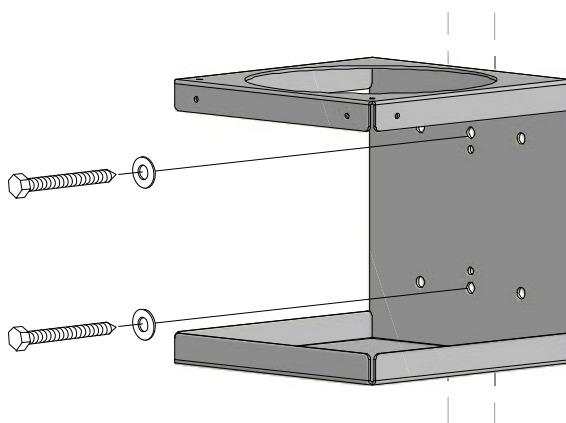

5. Insert a gallon jug with pump into the bracket for use.
6. As needed, loop lanyard around jug and fasten to unit with the 1/4" screw provided.

Loop lanyard around jug.

Lanyard can be fastened on
either side of unit.



Care and Cleaning

Remove jug and wipe unit surfaces clean with a soft cloth slightly dampened with soap and water, then wipe again with water only. **DO NOT use abrasive materials** as they will damage the unit.